


Wiring scheme for 8 pin DIL to SON8.

DIL8	SON8
1	1
...	...
8	8

SON8

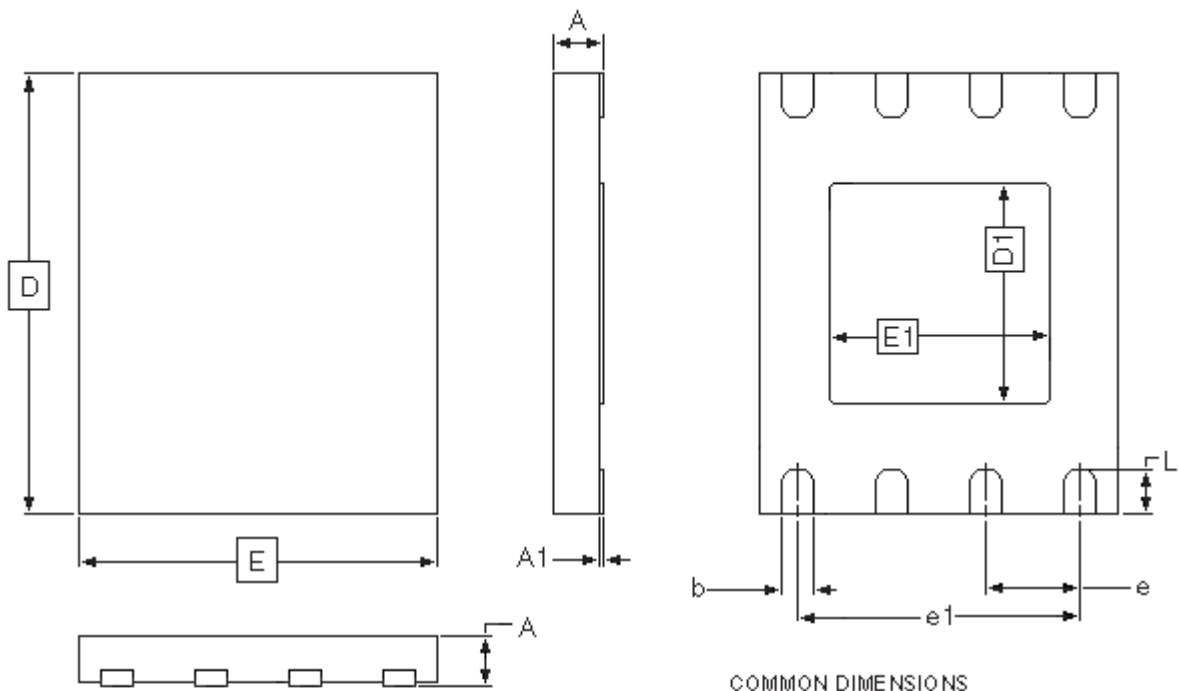

COMMON DIMENSIONS
(Unit of Measure = mm)

SYMBOL	MIN	NOM	MAX
A	-	-	0.80
A1	0.00	-	0.05
D	7.90	8.00	8.10
E	5.90	6.00	6.10
D1	4.60	4.65	4.70
E1	5.15	5.20	5.25
b	0.35	0.40	0.48
e	1.27 TYP		
e1	3.81 REF		
L	0.45	0.50	0.55